



TESLA P6

PB-08482-001_v02 | August 2017

Product Brief



DOCUMENT CHANGE HISTORY

PB-08482-001_v02

Version	Date	Authors	Description of Change
01	March 24, 2017	VK, DV	Initial release
02	August 31, 2017	VK, DV	Removed NVIDIA Confidential information

TABLE OF CONTENTS

Overview	1
Specifications.....	3
Product Specification.....	3
Design Discussion	5
Form Factor	5
MXM PCB Mounting Holes.....	6
Compute Mode	8
Support Information	9
Certificates and Agencies.....	9
Certifications	9
Agencies	9

LIST OF FIGURES

Figure 1. Tesla P6 Board	2
Figure 2. Tesla P6 Board Outline	5
Figure 3. Mounting Holes.....	6

LIST OF TABLES

Table 1. Product Specifications.....	3
Table 2. Memory Specifications.....	4
Table 3. Software Feature Specifications.....	4
Table 4. Thermal Specifications	4
Table 5. Tesla P6 Board Outline Specifications	6
Table 6. Mounting Holes Specifications.....	7
Table 7. Compute Mode Settings	8

OVERVIEW

The NVIDIA® Tesla® P6 is an MXM 3.1 Type B card with a single NVIDIA® Pascal™ GP104 graphics processing unit (GPU). It has 16 GB GDDR5 video memory and a 90 Watt maximum power limit.

This board is intended for accelerated graphics in virtual remote workstation and virtual desktop environments, as well as for single precision GPU compute tasks. Tesla P6 is specifically optimized for space constrained systems like blade servers.

NVIDIA does not ship this board with a cooling solution attached, however NVIDIA does provide thermal specifications for OEMs to design their custom heat sinks.

A main feature of the Tesla P6 board is the support of NVIDIA® GRID™ software which includes NVIDIA® GRID™ vGPU™. This technology enables the virtualization of physical GPUs into full-featured virtual GPUs providing maximum performance and scalability.

For performance optimization, this board utilizes NVIDIA GPU BOOST™. By adjusting the GPU clock dynamically, maximum performance is achieved within the power cap limit (90 W).

Tesla P6 supports H.264 and H.265 hardware encoding, which is particularly important for reducing round-trip latency and image quality for virtual desktops and applications.

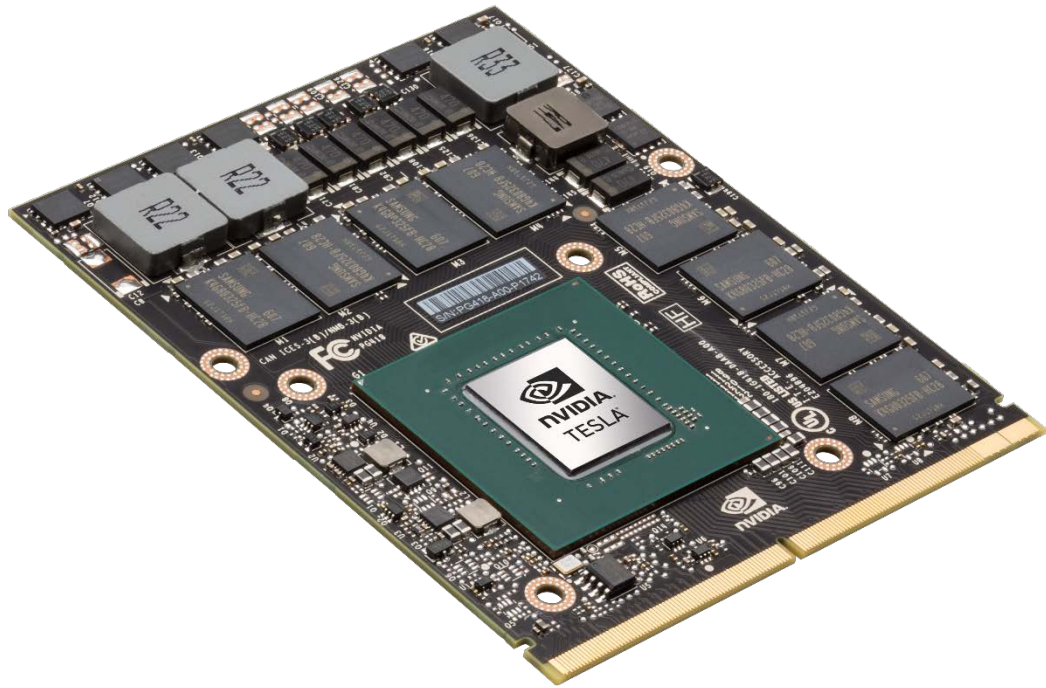


Figure 1. Tesla P6 Board

SPECIFICATIONS

PRODUCT SPECIFICATION

Table 1 provides the product specifications for the Tesla P6 board.

Table 1. Product Specifications

Specification		Description
Board SKU		PG418 SKU 200
Total board power		90 W (70 W optional)
GPU SKU		GP104-995
IDs		DEVID: 0x1BB4 SSID: 0x11C6
Form Factor		MXM 3.1 Type B
NVIDIA® CUDA® cores		2048
GPU clocks	Base	1012 MHz (TGP: 90 W)
	Boost	1506 MHz (TGP: 90 W)
PCI Express interface		P0: Gen3 16 lanes, 16.0 Gbps P8: Gen1 16 lanes, 2.5 Gbps

Table 2 provides the memory specifications for the Tesla P6 graphics board.

Table 2. Memory Specifications

Specification	Description
Memory clock	3003 MHz
Memory size	16 GB
Memory I/O	256-bit
Memory configuration	16 pcs 256M × 16 GDDR5s
Memory bandwidth	192.2 GB/s

Table 3 provides the software feature specifications.

Table 3. Software Feature Specifications

Specification	Description
EEPROM size	4 Mb Serial ROM
PCI class code	PCI base class: 0x03 PCI sub-class: 0x02
ECC support	Supported (enabled by default)
SMBPBI (SMBus Post Box Interface)	Supported

Table 4 provides the thermal specifications for the Tesla P6 graphics board.

Table 4. Thermal Specifications

Action	T_j (°C)
GPU shutdown temperature	94
GPU slowdown temperature	91
GPU maximum operating temperature	89
GPU hardware slowdown amount	50%

DESIGN DISCUSSION

FORM FACTOR

Tesla P6 follows the MXM 3.1 Type B mechanical specifications. For more details on the mechanical specifications, refer to the latest version of the *MXM Electromechanical Specification*.

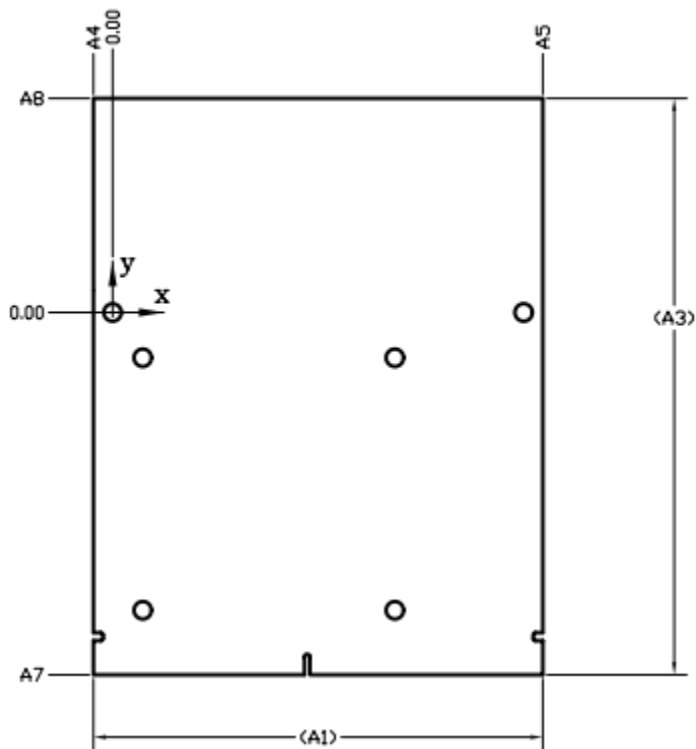


Figure 2. Tesla P6 Board Outline

Table 5. Tesla P6 Board Outline Specifications

Symbol	mm			inches		
	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum
A1		82.00			3.228	
A2		70.00			2.756	
A3		105.00			4.134	
A4	3.37	3.50	3.63	0.133	0.138	0.143
A5	78.37	78.50	78.63	3.085	3.091	3.096
A6	3.87	4.00	4.13	0.152	0.157	0.163
A7	65.87	66.00	66.13	2.593	2.598	2.604
A8	38.87	39.00	39.13	1.530	1.535	1.541

MXM PCB MOUNTING HOLES

The module has six holes. Two are used to secure the board to the system and the other four to fasten the thermal solution to the module.

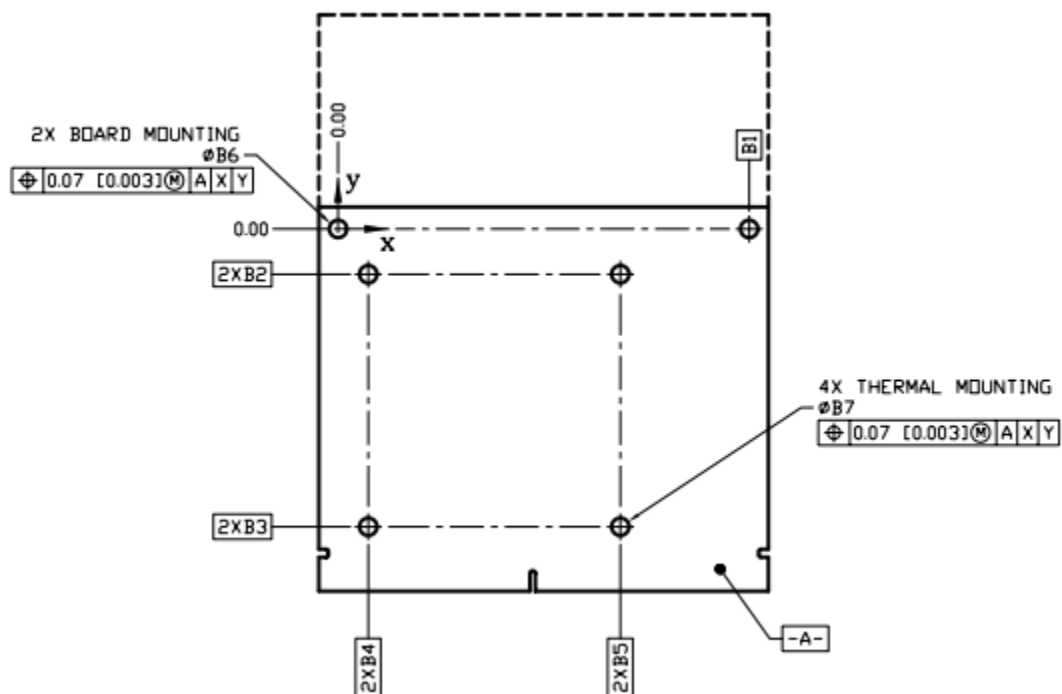


Figure 3. Mounting Holes

Table 6. Mounting Holes Specifications

Symbol	mm			inches		
	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum
B1		75.00			2.953	
B2		8.25			0.325	
B3		54.25			2.136	
B4		5.50			0.217	
B5		51.50			2.028	
B6	3.07	3.20	3.33	0.121	0.126	0.131
B7	3.07	3.20	3.33	0.121	0.126	0.131

COMPUTE MODE

In contrast to Tesla M6, Tesla P6 is offered only in compute mode. Starting with Pascal-generation boards, switching between graphics and compute mode is no longer required. NVIDIA GRID software automatically handles most setting adjustments previously requiring the switch to graphics mode. Nevertheless, ECC must be disabled before running NVIDIA GRID software.

Table 7 provides details of the compute mode settings.

Table 7. Compute Mode Settings

Setting	Value	Notes
Class code	3D Controller	This class code indicates to operating systems (OS) that the GPU is not intended for use as a primary display device.
Memory BAR	16 gigabytes	Tesla GPUs expose a large memory base address register (BAR) for direct access to the frame buffer from the CPU, and other PCI Express devices.
I/O base BAR	Disabled	The GPU need not consume any legacy I/O resources when used as a non-display device.
ECC protection	Enabled	Error Correcting Code (ECC) is enabled on the GPU frame buffer to protect against single- and multi-bit memory errors. ECC can be turned off.

SUPPORT INFORMATION

CERTIFICATES AND AGENCIES

Certifications

- ▶ Windows Hardware Quality Lab (WHQL):
 - Certified Windows 7, Windows 8.1, and Windows 10
 - Certified Windows Server 2008 R2, Windows Server 2012 R2, and Windows Server 2016
- ▶ EU Reduction of Hazardous Substances (EU RoHS)
- ▶ Joint Industry guide (J-STD) / Registration, Evaluation, Authorization, and Restriction of Chemical Substance (EU) – (JIG / REACH)
- ▶ Halogen Free (HF)
- ▶ EU Waste Electrical and Electronic Equipment (WEEE)

Agencies

- ▶ Australian Communications Authority and Radio Spectrum Management Group of New Zealand (C-Tick)
- ▶ Bureau of Standards, Metrology, and Inspection (BSMI)
- ▶ Conformité Européenne (CE)
- ▶ Federal Communications Commission (FCC)
- ▶ Industry Canada - Interference-Causing Equipment Standard (ICES)
- ▶ Underwriters Laboratories (cUL, UL)
- ▶ Voluntary Control Council for Interference (VCCI)

Notice

The information provided in this specification is believed to be accurate and reliable as of the date provided. However, NVIDIA Corporation ("NVIDIA") does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. NVIDIA shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This publication supersedes and replaces all other specifications for the product that may have been previously supplied.

NVIDIA reserves the right to make corrections, modifications, enhancements, improvements, and other changes to this specification, at any time and/or to discontinue any product or service without notice. Customer should obtain the latest relevant specification before placing orders and should verify that such information is current and complete.

NVIDIA products are sold subject to the NVIDIA standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NVIDIA and customer. NVIDIA hereby expressly objects to applying any customer general terms and conditions with regard to the purchase of the NVIDIA product referenced in this specification.

NVIDIA products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of the NVIDIA product can reasonably be expected to result in personal injury, death or property or environmental damage. NVIDIA accepts no liability for inclusion and/or use of NVIDIA products in such equipment or applications and therefore such inclusion and/or use is at customer's own risk.

NVIDIA makes no representation or warranty that products based on these specifications will be suitable for any specified use without further testing or modification. Testing of all parameters of each product is not necessarily performed by NVIDIA. It is customer's sole responsibility to ensure the product is suitable and fit for the application planned by customer and to do the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer's product designs may affect the quality and reliability of the NVIDIA product and may result in additional or different conditions and/or requirements beyond those contained in this specification. NVIDIA does not accept any liability related to any default, damage, costs or problem which may be based on or attributable to: (i) the use of the NVIDIA product in any manner that is contrary to this specification, or (ii) customer product designs.

No license, either expressed or implied, is granted under any NVIDIA patent right, copyright, or other NVIDIA intellectual property right under this specification. Information published by NVIDIA regarding third-party products or services does not constitute a license from NVIDIA to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from NVIDIA under the patents or other intellectual property rights of NVIDIA. Reproduction of information in this specification is permissible only if reproduction is approved by NVIDIA in writing, is reproduced without alteration, and is accompanied by all associated conditions, limitations, and notices.

ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. Notwithstanding any damages that customer might incur for any reason whatsoever, NVIDIA's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the NVIDIA terms and conditions of sale for the product.

Trademarks

NVIDIA, the NVIDIA logo, BOOST, CUDA, GRID, Pascal, and Tesla are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

Copyright

© 2017 NVIDIA Corporation. All rights reserved.